

GSM/GPS
Car Tracking Terminals

USER MANUAL

GGG-3B

Ver:1.00

CONTENTS

INTRODUCTION-----	2
Functions and Features-----	2
Technical Specification-----	2
Safety Instructions-----	3
INSTALLATION-----	3
Accessories-----	3
Installation Process-----	4
Instructions Before Use-----	5
OPERATIONS-----	6
ALERT REPORT TO USER -----	10

INTRODUCTION

Functions and Features

- > Apply to protect all type of cars, trucks, taxi, jeeps as well as other automobiles.
- > Simple installation
- > Locating and tracking
 - ◆ Dual location:
GPS Location tracking data report to monitor center by SMS/GPRS
locate your vehicle through both GPS positioning and GSM base station
 - ◆ Query locating information by telephone/ computer or via website if available
 - ◆ Real-time or pre-set time tracking by SMS/GPRS;
 - ◆ GEO, Over speed and Move Alert
- > SOS: pressing the hidden button, hi-jack alert to recipients
- > Power down alert: auto-SMS to the preset phone
- > With backup battery: after Power Failure Alert, it will supply power

Technical Specification

- > GSM Work Frequency: 850 (Optional) /900 /1800 /1900MHz
- > Temperature: Working Temp -20°C ~ +60°C
- > Humidity: 20—95%
- > GSM Antenna
 - Cable type: Gain:3dBi cable-length:3-5meters connector :SMA
 - Portable antenna: Gain:2dBi height: 5cm connector: SMA
- > GPS Antenna: Voltage:3V cable-length: 3-5 meters connector: SMA
- > Stop relay: 12V/24V 40A

- > Mainframe Power supply: 12/24V DC
- > Backup battery: Poly-Li battery, 600mAh 3.7V
- > Mainframe Dimension: 95x45x15mm
- > Weight: G.W.:0.5Kg/set (including accessories)

Safety Instructions

- > Please do not use the device in the areas where wireless device uses are prohibited.
- > Please use the accessories in the package, such as the antennas and relay.

INSTALLATION


Accessories


User necessities

1. 1-3 mobile phones for recipients
(Note: with SMS functions.)
2. One valid GSM SIM card for the devices
(with Caller ID & SMS functions and enough balance);

Basic components

1. Main Unit

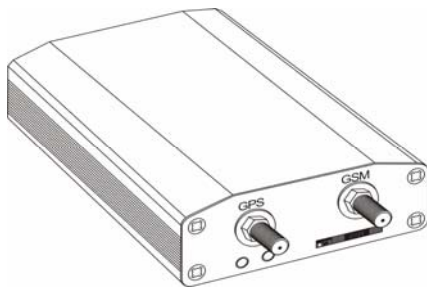

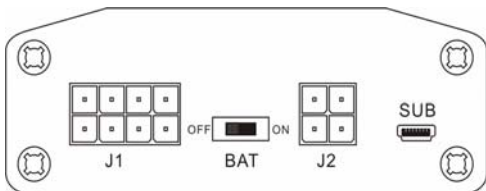

2. GSM antenna

3. GPS antenna

4. Stop relay



5. SOS button(optional)

6. PIN connection wire:



Installation Process

1. SIM Card Installation

2. GSM---GSM Antenna Installation


3. GPS--- GPS Antenna Installation

4. 6 PIN connection wire:

Power--- 2pin: Connect power wires to battery

Stop relay---2pin : Stop relay

SOS button--- 2pin: Connect SOS button wire

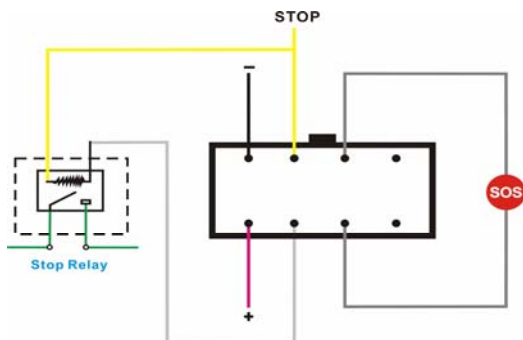

5. Plug the 6PIN into J1
6. Slide the battery switch to "ON".
7. Fix: After installation, check all the wires to be connected well,
Or use dual glue or band to fix them firmly.

Instructions Before Use

1. After installation and power on, LED shows the following status:

GSM LED (D1: red) :

Flashing fast: indicates that GSM have not registered

Flashing slowly: indicates that GSM works well.

State LED (D2: green):

LED On: sending SMS

LED Off: loading down

Flashing slowly: indicates system locating normally.

Flashing fast: indicates system is locating invalid.

- 2. Factory default : Recipient: Non
Password: 1234
Time Zone: +/-0000
GEO alert: off
Over speed alert: off
- 3. Battery: Auto-charging when it connects to power
- 4. GSM/GPS Ant: locate the antennas in suitable area to get signal well.

OPERATIONS

User Operations by SMS

SMS format: *PASSWORD*COMMAND#. (sent by any mobile phone)

The PASSWORD in SMS below is abbreviated to: **PWD**

1. Modify PASSWORD

Send the SMS to the device: [*PWD*EXXXX#](#)

Setup successful, it replies : [Password has been changed!](#)

Note: xxxx refers new PASSWORD. It is constituted by 4 ASCII codes.

Factory default:1234.

2.SMS set up recipient A, B and C

2.1 setting up:

Send the SMS to the device:

[*PWD*AXXXXXXXXXX*BXXXXXXXXXXXXX*CXXXXXXXXXXXXX#](#)

Setup ok, the reply SMS:

[Armed/Unarmed: A: XXXXXXXX B:XXXXXXX C:XXXXXXXXXX](#)

2.2 Change or Cancel recipients:

re-set with new recipients.

Note: ① A,B,C indicates the recipients A,B,C.

xxxxx...indicates the recipients mobile phone number. Max: 20 digits.

② "+country code" must be added when SMS format requires

SMS Format: + Country Code + mobile phone number.

Exp: Recipient A,C setup: *1234

*A+8613666504824*B*C+8613666502528# (+86 refers to China code; 136xxxxx refers to Recipients mobile number)

③ Recipient number shows blank if you do not set up it.

3. Set up Time-zone

Send the SMS to the device: *PWD * GMT+/-xxxx#

Setup OK, the reply SMS: GMT+/-xxxx SETUP OK !

Note: '+' is east zone; '-' is west zone

Exp: Setting up East 8 zone(GMT+08:00), the SMS is *1234*GMT+0800#

West 3:30 zone(GMT-3:30), the SMS is *1111* GMT-0330#

4. Overspeed alert On/Off

on:

Send the SMS: *PWD *SPDxxx,SS#

Reply SMS: Over speedxxx alert on !

off:

Send the SMS: *PWD *SPD000#

Reply SMS: Over speed alert off !

Note: xxx: choose 020~999 Km/H., ss: 01~99min

5. Over GEO range report: On/Off

On:

SMS: *GPWD*SC:N/SXXXX.XX,E/WXXXXX.XX,XXXXX#

Reply: GEO Report On / Format Error!

Off:

SMS: *GPWD*SC:00000#

Reply: GEO report off!

Note: the format of the Long/Lat

Exp: *1234*SC:N04149.20,E12323.52,00800#

- N4149.20: north latitude of the center point 41°49.20`
- E12323.52: east longitude of the center point 123°23.52`
- 00800: radius 800m

6. Immobilize / Relieve

6.1 STOP the car by SMS

Send the SMS in emergency: *UPWD*STOP#

Set up successfully, it replies: Engine will be turned off!

Note: To restart your engine, you will have to Relieve 'STOP' command.

6.2 Re-energize By SMS:

Send the SMS to the device: *UPWD*K#

Set up successfully, it replies: Engine can be start now !

7. Resume to Factory Default

Send the SMS to the device: *UPWD*V#

Setup successful, it replies: Factory Default Restored!

8. Wrong Message

In case SMS command invalid, you will receive the prompt SMS:
FORMAT incorrect, please confirm!

9. Query

9.1 Recipients Query

Send the SMS to the device: *PWD*Y#

Query successfully, the reply SMS: A:XXXXXXXXB:XXXXXXXXXXC:XXXXX

9.2 Vehicle Address Query

A. GPS Data Query: (Format: Degree/ Minute/Second)

Send the SMS: *UPWD*GPSM#

SMS reply: Time:xx-xx-xx xx:xx:xx Speed:xxxkm/h S/N:xxdxxmxxs
W/E:xxdxxmxxs

B. GPS Data Query: (Format: Degree)

Send the SMS: *UPWD*GPSD#

SMS reply: Time:xx-xx-xx xx:xx:xx Speed:xxxkm/h S/N:xx.xxxx
W/E:xxx.xxxx

C. GPS Data Query: (GPS Standard Format)

Send the SMS: *UPWD*GPS#

SMS reply: \$GPRMCxxxxxxxx

Note: GPS fails to position, SMS reply: NO GPS!



1. Emergency Alert (SOS)

In emergency situation, by pressing the hidden SOS button, the SOS alert is sent directly to the recipients.

Highjack Alert; LAC:xxxxxCID:xxxxx; Time:xx-xx-xx xx:xx:xx

Speed:xxxkm/h S/N:xx.xxxx W/E:xxx.xxxx

2. Power-off Alert:

Power off Alert; LAC:xxxxxCID:xxxxx; Time:xx-xx-xx xx:xx:xx

Speed:xxxkm/h S/N:xx.xxxx W/E:xxx.xxxx

3. Over speed Alert:

Overspeed Alert; LAC:xxxxxCID:xxxxx; Time:xx-xx-xx xx:xx:xx

Speed:xxxkm/h S/N:xx.xxxx W/E:xxx.xxxx

4. GEO Alert:

GEO Alert; LAC:xxxxxCID:xxxxx; Time:xx-xx-xx xx:xx:xx

Speed:xxxkm/h S/N:xx.xxxx W/E:xxx.xxxx